






FK480-9

Total Weight: 48800 kg

Standard bucket capacity: 2.3 m³

Rated power: 254/1800 kW/r/min

- New generation product
- Exquisite
- Reliable structure
- Excellent performance
- Small and efficient
- Convenient maintenance
- Cost-effective

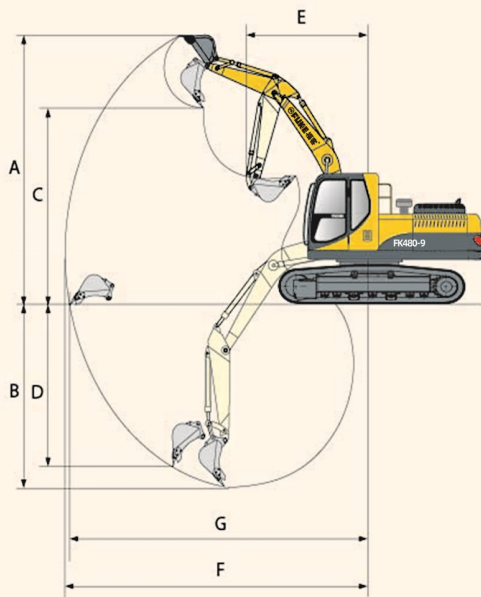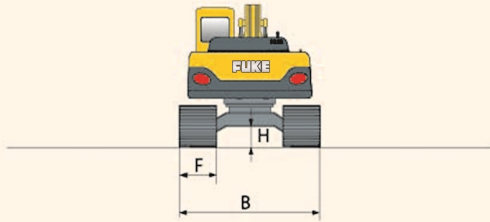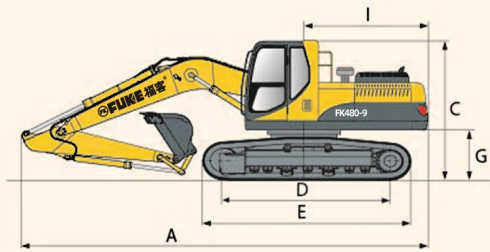

► Technical specifications

Basic parameters

Total Weight	48800 kg
Standard bucket capacity	2.3 m ³

Performance parameter

Engine	Cummins
Engine rated power	254/1800 kW/r/min
Gradeability	70 %
Volume of fuel tank	650 L
Bucket excavation	276 kN
Driving speed	3.0-4.8 km/h
Platform rotation speed	8.6 r/min

Job parameters

Maximum digging height	10910 mm	A
Maximum digging depth	7810 mm	B
Maximum unloading height	7550 mm	C
Maximum vertical digging distance	6800 mm	D
Minimum radius of gyration	4825 mm	E
Maximum digging distance	12025 mm	F
Maximum ground excavation distance	11815 mm	G

Transport size

Overall length (transport state)	12180 mm	A
Overall width (transport state)	3340 mm	B
Overall height (transport state)	3280 mm	C

Other parameters

Bucket width	1463 mm	
Wheelbase	4030 mm	D
Track length	4961 mm	E
Track width	600 mm	F
Counterweight ground clearance	1244 mm	G
Minimum ground clearance	530 mm	H
Radius of tail gyration	3308 mm	I

安徽福客重工设备有限公司
Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:

Phone/Whatsapp:+8613901687527

Email:fk002@fukebn.com/hesun525@gmail.com

www.fukeonline.com

